

PERGO®


Water Resistant Parquet Skirting
Technical data sheet - English

TECHNICAL DATA SHEET - EDITION 04.2023

Water Resistant Parquet Skirting

General information

Water-resistant parquet skirting which matches the colour of your floor. Easy to install with our Multiglue Glue. Use the Foamstrip and Aqua Sealant to obtain a watertight finish.

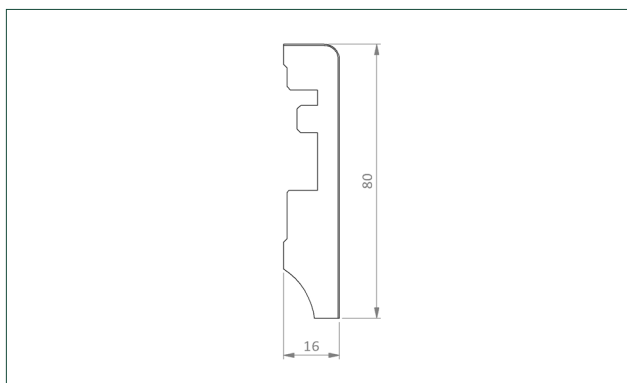

CONTENTS

6 x skirting

COMPOSITION

Moisture resistant MDF core (green) wrapped with real wood veneer

COLOUR

Colour matched

Packaging

Headcartons and shrink-wrapping

-

TECHNICAL DATA SHEET - EDITION 04.2023

Water Resistant Parquet Skirting

ORDER CODE	DIMENSIONS
PGWPPSKR(-)MM	2400 x 16 x 80 mm

Applicable for:

Lofoten, Svalbard and Falster floor range.

The floor must be able to expand and contract on all sides. This is why an expansion gap must be provided on all sides of the floor, around pipes, thresholds and under door frames. The exact expansion gap size depends on the floor type. Consult the installation documentation of your Pergo floor to know the required size of the expansion gap. To finish off this gap, we offer other skirting and profiles ranges.

TECHNICAL DATA SHEET - EDITION 04.2023

Water Resistant Parquet Skirting

Features

Pergo accessories are specifically developed for Pergo floors.

- **Perfectly matching colours**

Our skirtings and profiles flawlessly match the colour of every floor.

- **Scratch and wear resistant real veneer top layer**

Skirtings and profiles are protected against everyday wear and tear.

- **Water-resistant**

Water-resistant skirtings which perfectly match with your Pergo Lofoten, Svalbard and Falster floor.

- **Pergo warranty**

Skirtings come with the same warranty as your floor.



TECHNICAL DATA SHEET - EDITION 04.2023

Water Resistant Parquet Skirting

Installation

The water-resistant parquet skirting can be installed in the following way:



1. The water-resistant parquet skirtings can be attached with our Multiglue. This multi-functional adhesive is specially designed for the installation of Pergo accessories. Order code: PGGLUE290
2. Use the Foamstrip (NEFOAMSTRIP20) and Aqua Sealant (PGKITTRANSP) to seal the expansion gap so no water penetrates behind your skirtings and under the floor.
3. Make sure you use a sharp saw blade when mitering your skirtings. Finish cut edges with mitre bond and activator.

Unilin bv division flooring
Ooigemstraat 3, B-8710 Wielsbeke
T: +32 56 67 52 11
unilin.com
pergo.com

 **UNILIN**

PERGO®